



Příslušenství pro válce série FVBC

série VLB – patní upevnění



průměr	32	40	50	63	80	100
typ	VLB-32	VLB-40	VLB-50	VLB-63	VLB-80	VLB-100
AA	158	179	190	209	248	266
AC	142	161	170	185	210	228
AD	8	9	10	12	19	19
AE	47	53	63	75	95	115
AF	32	36	45	50	63	75
AG	24	28	32	32	41	45
AH	32	36	45	50	63	71
AP	7	9	9	9	12,5	14,5
AT	5	5	5	5	5	5

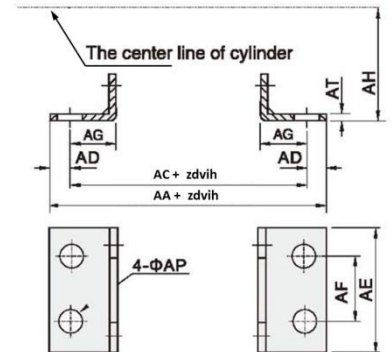

série VFB – přírubové upevnění

průměr	32	40	50	63	80	100
typ	VFB-32	VFB-40	VFB-50	VFB-63	VFB-80	VFB-100
AJ	11	11	13	13	17	17
AK	7	7	9	9	11	11
BA	30,5	35,5	40,5	45,5	45,5	55,5
BB	10	10	12	12	16	16
BC	47	53	65	75	95	115
BD	32	36	45	50	63	75
BE	80	90	110	125	154	186
BF	64	72	90	100	126	150
BH	4	4	6	4	6	6

BE, BF, BB, BA, BC, BD, 4-ΦBP, BH, AK, BH

série VCA – kyvné upevnění

průměr	32	40	50	63	80	100
typ	VCA-32	VCA-40	VCA-50	VCA-63	VCA-80	VCA-100
S	47	53	65	75	95	115
T	32,5	36	46,5	56,5	72	89
DC	22	25	27	32	36	41
DD	9	12	12	15	15	20
DE	10	12	12	16	16	20
DJ	13	16	17	22	22	27
DQ	25,6	27,8	31,7	39,7	49,7	59,7

DC, DJ, DD, DE, DQ, S, T, ΦDE

série VCB – kyvné upevnění

průměr	32	40	50	63	80	100
typ	VCB-32	VCB-40	VCB-50	VCB-63	VCB-80	VCB-100
CC	22	25	27	32	36	41
CD	9	12	12	15	15	20
CE	10	12	12	16	16	20
CJ	13	16	17	22	22	27
CP	26	28	32	40	50	60
CT	45	52	60	70	90	110
PA1	51	59	67	77	97	119
PB1	45,5	52,5	60,5	70,5	90,5	110,5
S	47	53	65	75	95	115
T	32,5	38	46,5	56,5	72	89

CC, CJ, CD, CE, CT, CP, PA1, PB1, S, T, ΦCE


www.mos-pneumatics.com

Příslušenství pro válce série FVBC

série VCR – kyvné upevnění




průměr	32	40	50	63	80	100
typ	VCR-32	VCR-40	VCR-50	VCR-63	VCR-80	VCR-100
S	47	53	65	75	95	115
T	32,5	38	46,5	56,5	72	89
DC	32	36	45	50	63	70
DD	10	11	12	15	15	19
DE	10	12	12	16	16	20
DF	21	24	33	37	47	55
DJ	8	10	12	12	14	15
DQ	25,8	27,8	31,7	39,7	49,7	59,7

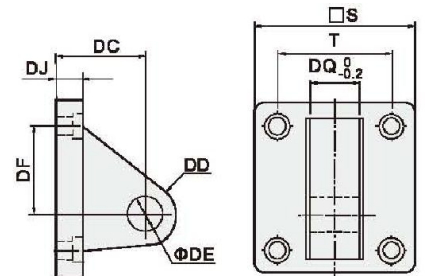

série VYC – vidlice na pístnici




průměr	32	40	50	63	80	100
typ	VYC-25/32	VYC-40	VYC-50/63	VYC-50/63	VYC-80/100	VYC-80/100
NA	19	25,4	32	32	44,4	44,4
NC	10	12	16	16	20	20
ND	40	48	64	64	80	80
NH	M10x1,25	M12x1,25	M16x1,5	M16x1,5	M20x1,5	M20x1,5
NM	10	12	16	16	20	20
NP	20	24	32	32	40	40
NQ	52	62	83	83	105	105
PA	26,2	32,8	39,3	39,3	53,3	53,3
PB	20	26,5	33	33	45	45

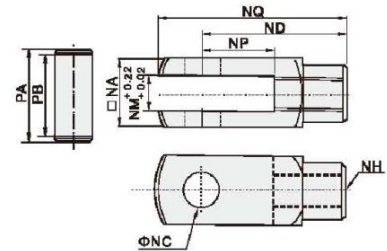

série VF – flexospojka na pístnici




průměr	32	40	50	63	80	100
typ	VF-25/32	VF-40	VF-50/63	VF-50/63	VF-80/100	VF-80/100
MA	73	77	106	106	122	122
MB	20	24	32	32	40	40
MC	6	7	8	8	10	10
MD	45	46	62	62	68	68
ME	8	7	12	12	14	14
MF	26	26	34	34	42	42
MG	M10x1,25	M12x1,25	M16x1,5	M16x1,5	M20x1,5	M20x1,5
MH	12	12	19	19	19	19
MI	M10x1,25	M12x1,25	M16x1,5	M16x1,5	M20x1,5	M20x1,5

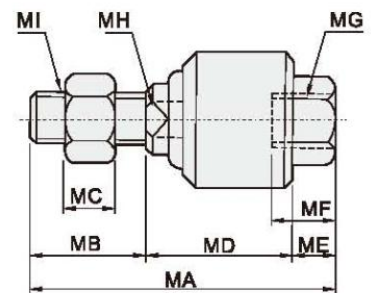

série VB – kloubové oko na pístnici



průměr	32	40	50	63	80	100
typ	VB-25/32	VB-40	VB-50/63	VB-50/63	VB-80/100	VB-80/100
PA	14	16	21	21	25	25
PB	28	32	42	42	50	50
PC	10	12	16	16	20	20
PD	15	17	22	22	26	26
PE	20	22	28	28	33	33
PF	43	50	64	64	77	77
PG	57	66	85	85	102	102
PH	M10x1,25	M12x1,25	M16x1,5	M16x1,5	M20x1,5	M20x1,5

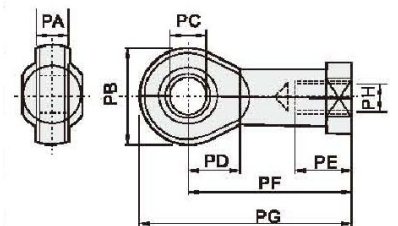

Příslušenství pro válce série FVBC

série HX – magnetický spínač do drážky

	princip	napětí	spínací proud	signalizace	frekvence	teplota	funkce	ochrana
HX-31P	REED	5-240 V DC/AC	100 mA	červená LED	200 Hz	10 - 70 °C		IP67
HX-31R	PNP	5-30 V DC	100 mA	zelená LED	1000 Hz	10 - 70 °C		IP67

